


50 YEARS OF INNOVATION ZERO COST INVESTMENT HIGH DEMAND PRODUCT



TITAN 5 LITE

Titan Lite Shields are built tough, yet are extremely manageable in the trench.

The Titan 5 Lite is an all steel trench box that is designed for light duty trenching. Innovative engineering allows for thicker steel on the perimeter, where it is needed, while the continuous vertical and horizontal formed steel members give extreme strength in the trench. Despite its toughness and strength, it is remarkably easy to lift and move in the trench.

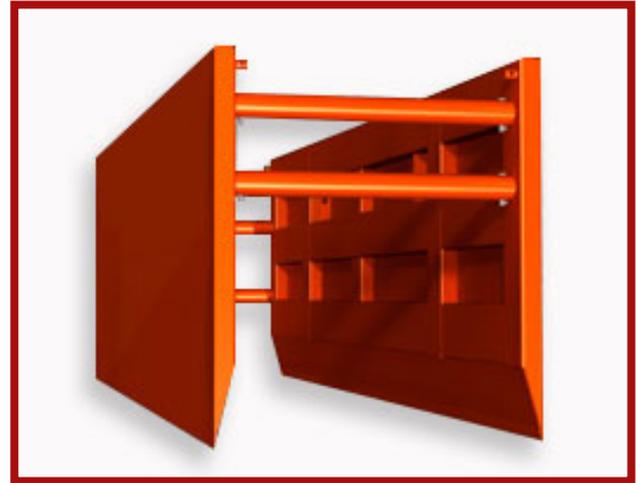

TITAN 5 LITE
Titan Lite Shields



FEATURES

- 18" High Tapered, Reinforced Knife Edge for more room in the pipe zone
- Light Weight Design for easy movement in the trench
- 5" Solid Steel Sockets
- 3/4" Thick Pounding Pads
- 2-1/2" Solid Stacking Lug Bar
- 3/8" x 3" Cutting Bar
- Formed Steel Design with Continuous Steel Members
- Easy Slide Outside Edge
- Once "C" Soil Depth Rating
- Perfectly positioned Lift Points for easy handling
- Internal Shelving for storage of tools and miscellaneous items



SPECIFICATIONS

Primary Uses: Mainline Work
Excavator Weight Range: 21K to 64K
Production Depth: 8' to 16'
Side Wall: 5"

LENGTH	4'	SHIELD WT	MACH WT	5'	SHIELD WT	MACH WT
	16' - ST	3131	21K	16' - ST	3486	23K
	18' - ST	3580	24K	18' - ST	3856	26K
	20' - ST	3580	26K	20' - ST	4182	28K
	22' - ST	4208	28K	22' - ST	4182	30K
	24' - ST	4662	31K	24' - ST	4990	33K
	26' - ST	4963	33K	26' - ST	5342	36K

LENGTH	6'	SHIELD WT	MACH WT	8'	SHIELD WT	MACH WT
	16' - ST	3942	26K	16' - ST	4961	33K
	18' - ST	4590	31K	18' - ST	5690	38K
	20' - ST	5395	35K	20' - ST	6197	41K
	22' - ST	5795	36K	22' - ST	6687	45K
	24' - ST	5997	40K	24' - ST	7358	49K
	26' - ST	6393	43K	26' - ST	8072	54K

LENGTH	10'	SHIELD WT	MACH WT
	16' - ST	5980	40K
	18' - ST	6965	46K
	20' - ST	7592	51K
	22' - ST	8188	55K
	24' - ST	8989	60K
	26' - ST	9569	64K